


Change Record					
Area	Mark	Change Content Description	Date	Changer	Approver
N/A	N/A	First Issue	2019-08-28		



Unmarked Dimension Tolerance Table					
>	≤	Plastic	Metal	Die-cutting	Silica-gel
0	3	±0.05	±0.05	±0.10	±0.10
3	6	±0.07	±0.05	±0.10	±0.10
6	30	±0.10	±0.10	±0.15	±0.15
30	120	±0.15	±0.15	±0.25	±0.25
120	~	±0.20	±0.20	±0.30	±0.3%
Unmarked angle tolerance ±0.5°					

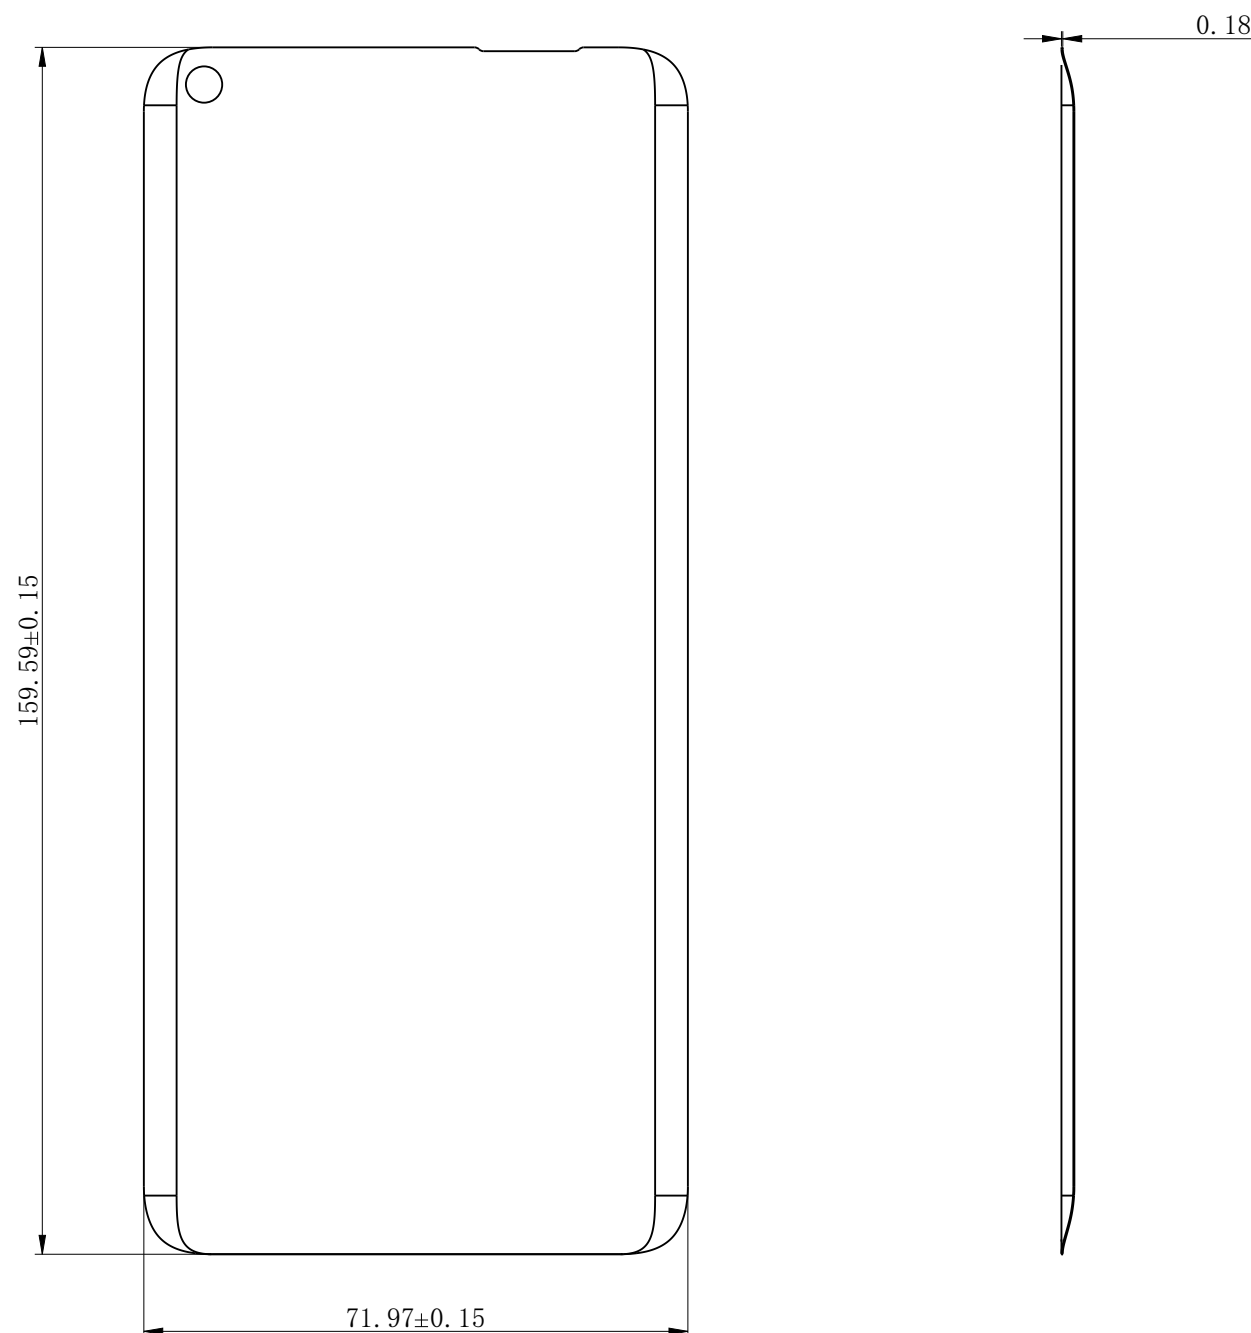

NOTES:

NOTES:

- 1.Drawing dimensions are used to check the shape, function and assembly of parts;
- 2.Material: 0.18mm soft film:
Layered structure:0.05mm PET+0.10mm TPU+0.03 Silica gel;
- 3.The edge of the die-cutting part shall be neat without obvious fiber and fine chip residues;convex and concave points/printing/pressing;scratches;white spots, black spots,filaments and other appearance defects.
- 4.Those marked with "*" are the key control dimensions.For those not marked with dimension, refer to 3D, and for those not marked with tolerance, refer to tolerance table;
- 5.Transmittance of HD 3D and HD protective film $\geq 91\%$ (UV spectrophotometer), haze $\leq 0.9\%$ (haze tester)
- 6.Material code: 4878865

			TP protect film		QT-CC170-TP-PROTECT-FILM		
Design	Cherenhe	2019-8-28	Material		Scale	Version	Version
Check					1:1	1	V1
Standardize			Surface Treatment		Unit	Weight (g)	
Approve			Page 1	Total 1	mm		